Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 113988

H11L1X, H11L2X, H11L3X, H11L4X
H11L1, H11L2, H11L3, H11L4

MICROPROCESSOR COMPATIBLE SCHMITT TRIGGER OPTICALLY COUPLED ISOLATOR

APPROVALS

- UL recognised, File No. E91231

'X' SPECIFICATION APPROVALS

- VDE 0884 in 2 available lead forms : -
  - STD
  - G form

DESCRIPTION

The H11L1, 2, 3, 4 series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode and a Microprocessor Compatible Schmitt trigger output mounted in a standard 6 pin dual in line package.

FEATURES

- Options :-
  10mm lead spread - add G after part no.
  Surface mount - add SM after part no.
  Tape&reel - add SMT&R after part no.
- High data rate, 1MHz typical (NRZ)
- Microprocessor compatible drive
- Logic compatible output sinks 16 milliamperes at 0.4 volts maximum
- High Isolation Voltage ($5.3kV_{RMS}$,$7.5kV_{PK}$)
- High common mode rejection ratio
- Fast swiching : t *rise*, t *fall* = 100ns typical
- Wide supply voltage capability, compatible with all popular logic systems
- Guaranteed On / Off threshold hysteresis

APPLICATIONS

- Logic to logic isolator
- Line receiver-eliminates noise and transient problems
- Programmable current level sensor
- AC to TTL conversion - square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals

OPTION SM
SURFACE MOUNT



OPTION G



Dimensions in mm

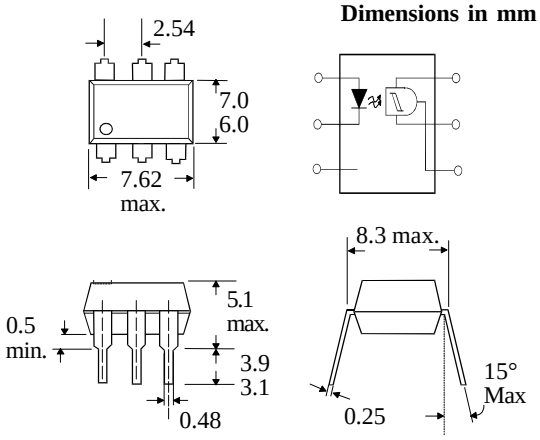

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation (derate linearly 1.33mW / °C above 25°C)	105mW

OUTPUT DETECTOR

V_{45} allowed range	0 to 16V
V_{65} allowed range	0 to 16V
I_4 output current	50mA
Power Dissipation (derate linearly 2mW / °C above 25°C)	150mW

POWER DISSIPATION

Total Power Dissipation (derate linearly 2.27mW/ °C above 25°C)	170mW

ELECTRICAL CHARACTERISTICS (T_A= 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	0.75			V	I_F = 0.3mA
	Forward Voltage (V_F)			1.5	V	I_F = 10mA
	Reverse Current (I_R)			10	µA	V_R = 3V
	Capacitance (C_J)			100	pF	V = 0, f = 1MHz
Output	Operating Voltage Range (V_{CC})	3		15	V	
	Supply Current I_6 (off)		1	5	mA	I_F = 0mA, V_{CC} = 5V
	Output Current High (I_{OH})			100	µA	I_F= 0mA,V_{CC}= V_O=15V
Coupled	Supply Current I_6 (on)		1.6	5	mA	I_F = 10mA, V_{CC} = 5V
	Output Voltage, Low (V_{OL})			0.4	V	R_L= 270Ω, V_{CC} = 5V
	Turn-on Threshold Current I_F (on)					
	H11L1			1.6	mA	R_L= 270Ω, V_{CC} = 5V
	H11L2			10	mA	R_L= 270Ω, V_{CC} = 5V
	H11L3			5	mA	R_L= 270Ω, V_{CC} = 5V
	H11L4			2	mA	R_L= 270Ω, V_{CC} = 5V
	Turn-off Threshold Current I_F (off)	0.3			mA	R_L= 270Ω, V_{CC} = 5V
	Hysteresis Ratio I_F (off) / I_F (on)	0.5		0.9		R_L= 270Ω, V_{CC} = 5V
	Input to Output Isolation Voltage V_{IS0}	5300			V_{RMS}	See note 1
		7500			V_{PK}	See note 1
	Turn-on Time t_{on}		0.57		µs	R_E = 1200Ω
	Fall Time t_f		0.09		µs	C =270pF
	Turn-off Time t_{off}		1.40		µs	f ≤100kHz
	Rise Time t_r		0.05		µs	tp = 1µs or greater

Note 1 Measured with input leads shorted together and output leads shorted together.
Note 2 Special Selections are available on request. Please consult the factory.

SWITCHING CHARACTERISTICS

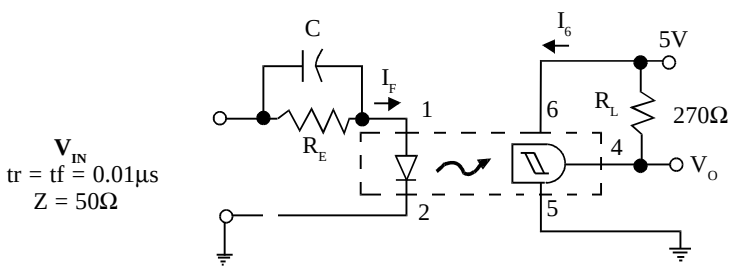

SWITCHING TEST CIRCUIT

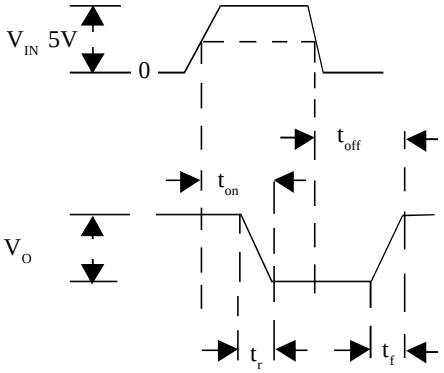

Transfer Characteristics

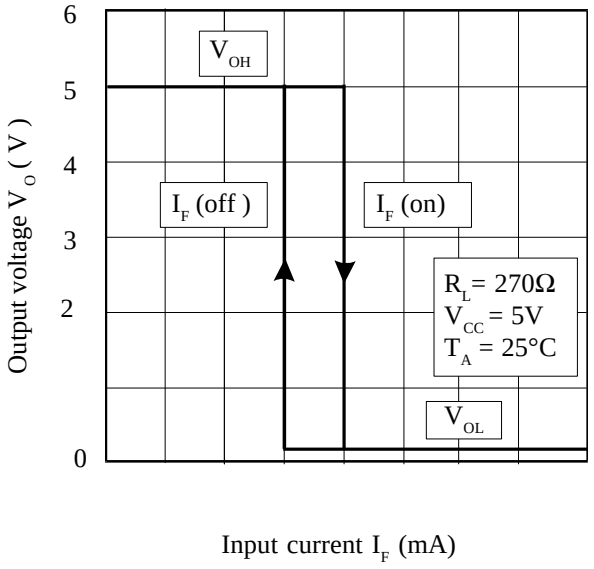

On Voltage vs. Load Current

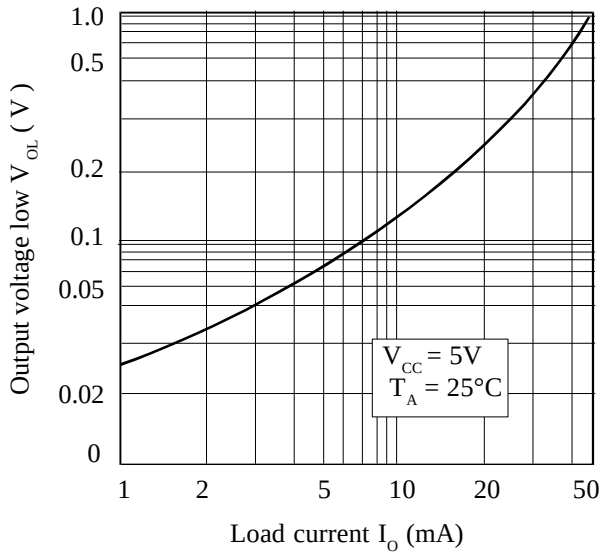

Threshold Current vs. Supply Voltage

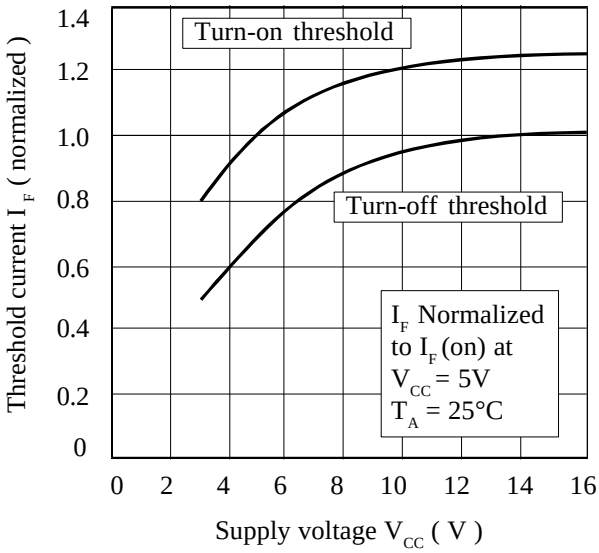

Forward Voltage vs. Forward Current

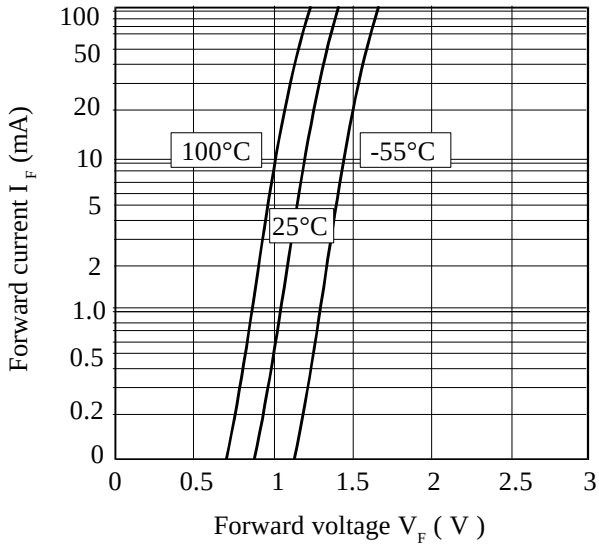

Threshold Current vs. Ambient Temperature

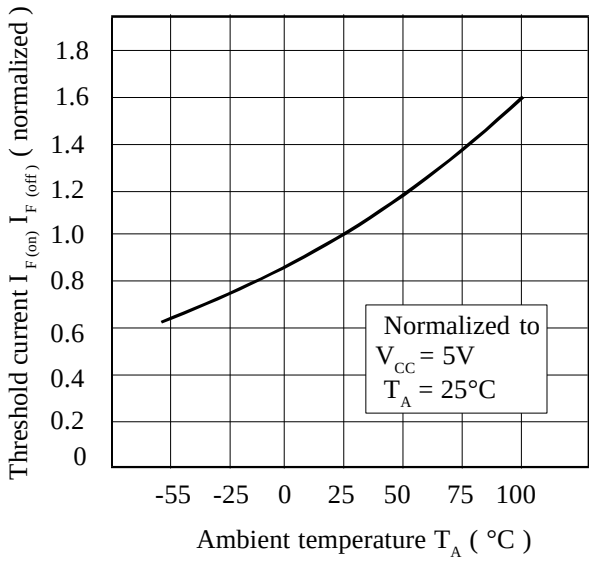

Supply Current vs. Supply Voltage